



Flow transmitter / flow switch for general industrial applications

Technical information TI11.18

In brief



Application

- Machinery and plant engineering
- Air-conditioning and refrigeration plant engineering
- Hydraulic and pneumatic systems
- Process industry
- Environmental technology
- Facility and building automation

Main features

- Flow velocities from 3cm/s to 300cm/s
- Wide variety of process connections and sensor lengths
- Wear-free calorimetric sensor
- Process temperature range -20°C to +110°C
- High process pressure tightness up to 40bar
- Fully welded robust steel enclosure
- High protection class IP69K/IP67
- Evaluation electronic RS485 Modbus®-RTU / IO-Link®

Description

The device is an electronic flow resp. temperature switch for monitoring, control and continuous measurement of flow and temperatures in liquids. A high variety of versions of process connections and electronic types allows the use for a wide range of applications, also for demanding measuring requirements.

Due to its high accuracy and the digital adjustability by RS485 Modbus®-RTU or IO-Link® the device can be suited to a wide variety of applications.

The robust design and the high-quality workmanship turns the device into a very high quality product, which even the most adverse environmental conditions cannot affect, whether the lowest temperatures when used outdoors, extreme shock and vibration stress or aggressive media.

A captive laser marking of the type

label ensures the identifiability throughout the entire lifetime of the device.

Obviously is the optional marking of a measurement point designation resp. TAG, a customer label or of a neutral type label, of course also per laser marking.

A LABS- resp. silicone-free version, a factory calibration with calibration certificate and a customer specific configuration resp. preset is also optionally available like a material test certificate EN10204 3.1 or a factory certifications for drink water suitability. Customer specific special versions can be realized short-term on request, e.g. special designs for the process connection or other process materials.




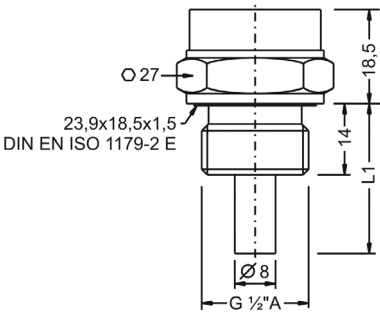
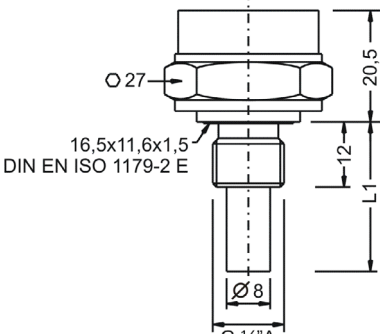


Technical Data

Measuring range	
Measuring principle	Calorimetric flow measurement
Nominal measuring range	3...300 cm/s
Output type V – RS485 Modbus®-RTU	
Interface	RS485, bidirectional / Modbus®-RTU / 9600 Baud (4800...38400 Baud)
Time behavior	Flow: T90 ≤ 6s / ton ≤ 10s Temperature: T90 ≤ 4s / ton ≤ 2s
Output type L – IO-Link®	
Interface	IO-Link® V1.1 / Com2 (38400 Baud)
Analogue output	0...20mA: 0...20,5mA / ≤ 0,05mA / ≤ 22mA / dI ≤ 1μA 4...20mA: 3,8...20,5mA / ≥ 3,6mA / ≤ 22mA / dI ≤ 1μA
Switch output	2x PP (Push-Pull), switch to +L/-L
Output	Uout ≤ 0,2V, ≥ Us – 2V / Iout 0...200mA (current limited ≤ 450mA, short circuit protected)
Time behavior	Flow: T90 ≤ 6s / ton ≤ 10s Temperature: T90 ≤ 4s / ton ≤ 2s
Auxiliary power	
Supply voltage Us polarity protected	Type V – RS485 Modbus®-RTU: 6...35VDC Type L – IO-Link®: 9...35VDC, without IO-Link® / 18...30VDC, with IO-Link®
Measuring accuracy	
Accuracy	Flow: ≤ ±5% Measuring end value (5...100cm/s) / (-20°C...+85°C) ≤ ±10% Measuring end value (100...175cm/s) / (-20°C...+85°C) Temperature: ≤ ±1,5K (≥ 20cm/s)
Long term drift	Flow: ≤ ±10% of measuring value / year (-20°C...+85°C)
Temperature deviation	Flow: ≤ ±0,4cm/s / K (-20°C...+85°C)
Process conditions	
Process temperature	-20°C...+110°C
Process pressure	≤ 40 bar
Environmental conditions	
Environmental temperature	-20°C...+100°C
Protection level	IP69K/IP67 (EN/IEC 60529)
MTTF	463 years

Electrical connection

Electronic output type V RS485 Modbus®-RTU	Electronic output type L IO-Link®

Terminal enclosure	
	
Process connection type 0 Thread G 1/2"A, DIN EN ISO 1179-2 E	Process connection type 3 Thread G 1/4"A, DIN EN ISO 1179-2 E
	

Order code



FU4S

K

S

V

C

S

0

0

0

S

Type

Standard

Measuring system

Calorimetric sensor

Approval

Standard

Process connection

0 Thread ISO 228-1 – G½"A, DIN EN ISO 1179-2 E

3 Thread ISO 228-1 – G¾"A, DIN EN ISO 1179-2 E

Y others

Material process gaskets (process wetted)

1 FPM – fluorelastomere (e.g. Viton®)

3 EPDM – ethylene-propylene-dienmonomere

Y others

Material process connection (process wetted)

V CrNi-steel

Material terminal enclosure

C CrNi-steel

Sensor length L1

Process connection

Type 0 – G½" / Type 3 – G¾"

0 30 mm / 28mm

1 49 mm / 47mm

2 79 mm / 77mm

3 119 mm / 117mm

Electronic – output

V RS485 Modbus®-RTU, 4-wire

L IO-Link®, 1x current 0/4...20mA / 2x switch, 4-wire

Electronic – function

S Standard

Process temperature

0 Standard –20°C...+110°C

0

0

Electrical connection

S Plug M12x1

Additional options

-SF LABS-free, silicone-free / paint compatible version

-ML Measurement point designation / TAG – Laser marking

-KL Customer label on device – Laser marking

-TN Type label neutral

-MZ Material test certificate – EN10204 3.1

-WT Factory certification – drink water suitability

-KF Configuration / Preset

-WK Factory calibration – calibration certificate

Flowcont® FU4S

K

S

V

C

S

0

0

0

S

PRC Technologies Corp., Ltd. ลาดพร้าว 101 กรุงเทพฯ 10240
โทรศัพท์ : 02 530 1714, 02 932 1711 มือถือ : 086 360 8600
อีเมล : contact@prctech.net LINE ID1 : prctec-info, LINE ID2 : prcsense