

Precont® PU4SE

Universal pressure transmitter / pressure switch
for general industrial applications

Technical information TI06.25




Application

- Machinery and plant engineering
- Air-conditioning and refrigeration plant engineering
- Hydraulic and pneumatic systems
- Process industry
- Environmental technology
- Facility and building automation

Main features

- Measuring ranges from 1 bar up to 100 bar
- Robust ceramic internal diaphragm
- Process temperature range -25°C to +100°C
- Fully welded robust steel enclosure
- High protection class IP69K/IP67
- High accuracy to $\leq 0,5\%$
- Electronic 4...20mA FSK / RS485 Modbus®-RTU / IO-Link® / 0...10V
- Electrical connection M12 plug or angled plug

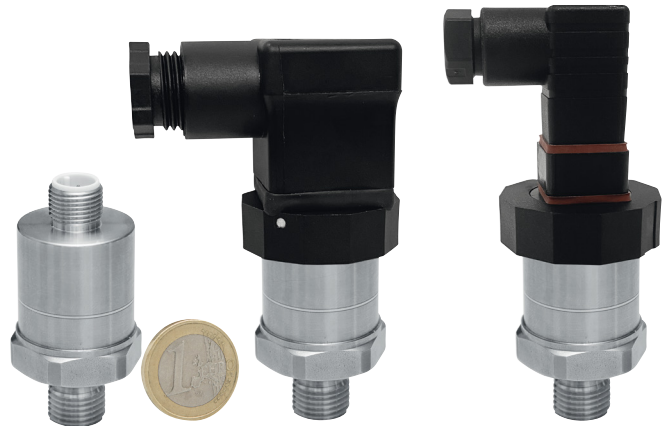

Description

The device is an electronic pressure sensor for monitoring, control and continuous measurement of pressures in gases, vapors, liquids and dusts.

Due to its high accuracy and the digital adjustability by FSK, RS485 Modbus®-RTU or IO-Link® the device can be suited to a wide variety of applications.

The long term stable and robust strain gauge ceramic measuring cell ensures reliable precise measuring values and allows the operation also at demanding environmental conditions, e.g. low temperatures, high shock and vibration loads or at problematic media.



FEEL FREE TO
CONTACT US

Lauterbachstr. 57 ½, D - 84307 Eggenfelden
info@acs-controlsystem.com
www.acs-controlsystem.com
+49 8721-96680

Technical Data

Measuring range										
Nom. pressure PN	[bar]	0...1	0...4	0...10	0...40	0...100	-	-	-	-
Output type A – Current 4...20mA FSK										
Analogue output 4...20mA	3,9...20,5mA, Measuring range [08] = 4...20mA, error ≤ 3,9mA / ≥ 20,5mA									
Time behaviour t90-min	≤ 5ms (td = 0s)									
Interface	FSK / 1200 Bit/s									
Output type A – Voltage 0...10V										
Analogue output	0...10,25V, Measuring range [08] = 0...10V, error 0V / ≥ 10,25V									
Time behaviour t90-min	≤ 5ms (td = 0s)									
Output type V – RS485 Modbus®-RTU										
Interface	RS485, bidirectional / Modbus®-RTU / 4,8...38,4 kBaud									
Input resistance	112kΩ									
Time behaviour t90-min	≤ 2ms (td = 0s)									
Output type L – IO-Link®										
Interface	IO-Link V1.1 / Port Class A / Com2 (38,4 kBaud), Com3 (230,4 kBaud)									
Switch output	2x PP (Push-Pull), switch to +L/-L									
Time behaviour t90-min	≤ 2ms (td = 0s)									
Auxiliary power										
Supply voltage Us / Input current Is / Ready delay time	Type A – 4...20mA FSK: 9...35VDC reverse polarity protected / Ripple voltage ≤ 2Vpp / ≤ 20,5mA / ≤ 0,1s (td = 0s) Type B – 0...10V: 14...35VDC reverse polarity protected / Ripple voltage ≤ 2Vpp / ≤ 25mA (Iuo = 0mA) / ≤ 0,1s (td = 0s) Type V – RS485 Modbus®-RTU: 6...35VDC reverse polarity protected / Ripple voltage ≤ 2Vpp / ≤ 10mA (Co = 0mA) / ≤ 0,1s (td = 0s) Type L – IO-Link® inactive: 9...35VDC reverse polarity protected / Ripple voltage ≤ 2Vpp / ≤ 20mA (Co / So / Io = 0mA) / ≤ 0,1s (td = 0s) Type L – IO-Link® active: 18...30VDC reverse polarity protected / Ripple voltage ≤ 2Vpp / ≤ 20mA (Co / So / Io = 0mA) / ≤ 0,1s (td = 0s)									
Measuring accuracy										
Characteristic deviation	≤ ±0,5%FSI									
Influence temperature	Tk ≤ ±0,05%FSI/K									
Long term drift zero	≤ ±0,2%FSI/year									
Process conditions										
Process temperature	-25°C...+100°C									
Pressure cycles	≥ 10 Mio. (1,2xPN)									
Environmental conditions										
Environmental temperature	-25°C...+100°C									
Protection level	IP69K/IP67 (EN/IEC 60529)									
MTTF	4...20mA: 745 years / 0-10V: 610 years / RS485 Modbus®-RTU: 561 years / IO-Link®: 601 years									

Electrical connection

Electronic output type A Current 4...20mA FSK Connection plug M12 Device within Ex-free area	Electronic output type V RS485 Modbus®-RTU	Electronic output type L IO-Link®	Electronic output type B Voltage 0...10V

Dimensions (mm)

Plug M12 [14-S]	Plug EN 175-301-803-C [14-C]	Plug EN 175-301-803-A [14-A]

Thread ISO 228-1 – G1/4", EN 837 [04-6]	Thread ISO 228-1 – G1/2", EN 837 [04-1]
Process pressure Pmax = 600 bar Torque Mmax = 50Nm	Process pressure Pmax = 600 bar Torque Mmax = 50Nm

Further terminal assignment can be found in the operating instructions or in the technical information.

Order code

Typ e PU4S Standard

Measuring system – material diaphragm (process wetted) / sensor type
Ceramic Al2O3 96% / strain gauge

Approval
Standard

Process connection
Thread ISO 228-1 – G½"A, EN 837 manometer
Thread ISO 228-1 – G½"A, EN 837 manometer
others

Material process gaskets (process wetted) FPM – fluorelastomere (e.g. Viton®)
others

Material process connection (process wetted) CrNi-steel

Material terminal enclosure
CrNi-steel

Measuring range
05 0...1 bar
08 0...4 bar
10 0...10 bar
13 0...40 bar
19 0...100 bar
YY Special measuring range

Electronic – output
Current 4...20mA, FSK, 2-wire
Voltage 0-10V, (only with Electrical connection – C or A)
RS485 Modbus®-RTU, 4-wire (only with Electrical connection – S)
IO-Link®, 1x current 0/4...20mA / 2x switch, 4-wire (only with Electrical connection – S)

Electronic function Standard
Process temperature Standard –25°C...+100°C

Pressure type Gauge pressure
Measuring system – accuracy 0,5%

Electrical connection
Plug M12x1
Plug EN 175-301-803-C (DIN 43650-C) Plug
EN 175-301-803-A (DIN 43650-A)

Additional options LABS-free, silicone-free / paint compatible version
-L Measurement point designation / TAG – Laser marking
-MZ Material test certificate – EN10204 3.1
-KF Configuration / Preset
-WK Factory calibration – calibration certificate

Precont®
PU4S

PRC Technologies Corp., Ltd. ลาดพร้าว 101 กรุงเทพฯ 10240

โทรศัพท์ : 02 530 1714, 02 932 1711 มือถือ : 086 360 8600

อีเมล : contact@prctech.net LINE ID1 : prctec-info, LINE ID2 : prcsense