

Precont® PU4SK

Universal pressure transmitter / pressure switch
for general industrial applications

Technical information TI06.25




Application

- Machinery and plant engineering
- Air-conditioning and refrigeration plant engineering
- Hydraulic and pneumatic systems
- Process industry
- Environmental technology
- Facility and building automation

Main features

- Measuring ranges from 250 mbar up to 600 bar
- Wide variety of process connections
- Robust ceramic front-flush or internal diaphragm
- Process temperature range -40°C to +135°C
- Fully welded robust steel enclosure
- High protection class IP69K/IP67
- Highest accuracy to $\leq 0,15\%$
- Electronic 4...20mA FSK / RS485 Modbus®-RTU / IO-Link® / 0...10V
- Certification ATEX / IECEx: Ex ia IIC Ga / Ex ia IIIC Da
- Electrical connection M12 plug or angled plug

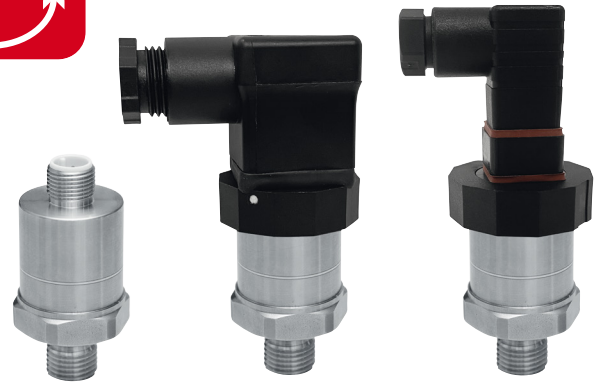

Description

The device is an electronic pressure sensor for monitoring, control and continuous measurement of pressures in gases, vapors, liquids and dusts.

A high variety of versions of process connections and electronic types allows the use for a wide range of applications, also for demanding measuring requirements.

Due to its high accuracy and the digital adjustability by FSK, RS485 Modbus®-RTU or IO-Link® the device can be suited to a wide variety of applications.

The front-flush process connection enables the cleanability of the wetted diaphragm to be integrated into the process, also by CIP/SIP cleaning processes. Low-maintenance and trouble-free pressure measurement is thus also guaranteed in critical applications with viscous or also frequently changing media.

The long term stable and robust strain gauge ceramic measuring cell ensures reliable precise measuring values and allows the operation also at demanding environmental conditions, e.g. low temperatures, high shock and vibration loads or at problematic media. Customer specific special versions can be realized short-term on request, e.g. special designs for the process connection or other process materials.



FEEL FREE TO
CONTACT US

Lauterbachstr. 57 1/2, D - 84307 Eggenfelden
info@acs-controlsystem.com
www.acs-controlsystem.com
+49 8721-96680

Technical Data

Measuring range										
Nom. pressure PN rel.	[bar]	-0,1...0	-0,1..0,1	-1...0	-1...1	0...0,05	0...0,1	0...0,2	0...0,4	0...0,6
Output type A – Current 4...20mA FSK										
Analogue output 4...20mA	3,9...20,5mA, Measuring range [08] = 4...20mA, error ≤ 3,9mA / ≥ 20,5mA									
Time behavior	≤ 5ms (td = 0s)									
Interface	FSK / 1200 Bit/s									
Output type V – RS485 Modbus®-RTU										
Interface	RS485, bidirektional / Modbus-RTU / 4,8...38,4 kBaud									
Input resistance	112kΩ									
Time behavior	≤ 2ms (td = 0s)									
Output type L – IO-Link®										
Interface	IO-Link V1.1 / Port Class A / Com2 (38,4 kBaud), Com3 (230,4 kBaud)									
Analogue output	3,8...20,5mA, measuring range [08] = 4...20mA, error ≤ 3,6mA / ≥ 21mA 0...20,5mA, measuring range [08] = 0...20mA, error ≤ 0,05mA / ≥ 21mA									
Time behavior	≤ 2ms (td = 0s)									
Switch output	2x PP (Push-Pull), switch to +L/-L									
Output type B - 0...10V										
Signal range	0...10,25V, Measuring range [08] = 0...10V, error 0V / ≥ 10,25V									
Time behaviour t90-min	≤ 5ms (td = 0s)									
Auxiliary power										
Supply voltage Us /Input current Is / Ready delay time	Type A – 4...20mA FSK: 9...35VDC reverse polarity protected / Ripple voltage ≤ 2Vpp / ≤ 20,5mA / ≤ 0,1s (td = 0s) Type A – 4...20mA FSK Ex: 9...30VDC / ≤ 2Vpp / ≤ 22mA Type B – 0...10V: 14...35VDC reverse polarity protected / Ripple voltage ≤ 2Vpp / ≤ 25mA (Iuo = 0mA) / ≤ 0,1s (td = 0s) Type V – RS485 Modbus®-RTU: 6...35VDC reverse polarity protected / Ripple voltage ≤ 2Vpp / ≤ 10mA (Co = 0mA) / ≤ 0,1s (td = 0s) Type L – IO-Link® inactive: 9...35VDC reverse polarity protected / Ripple voltage ≤ 2Vpp / ≤ 20mA (Co / So / Io = 0mA) / ≤ 0,1s (td = 0s) Type L – IO-Link® active: 18...30VDC reverse polarity protected / Ripple voltage ≤ 2Vpp / ≤ 20mA (Co / So / Io = 0mA) / ≤ 0,1s (td = 0s)									
Measuring accuracy										
Characteristic deviation	≤ ±0,05%FSI / ±0,1%FSI / ±0,2%FSI									
Long term drift zero	≤ ±0,15%FSI/year									
Influence temperature	Tk ≤ ±0,05%FSI/K									
Process conditions										
Process temperature	Standard: -40...+100°C (-40°F...+212°F) Extended: -40...+135°C (-40°F...+275°F) / +140°C (+284°F) – 1h FKM/FPM: -25...+140°C (-13°F...+284°F) EPDM: -40...+140°C (-40°F...+284°F) ATEX/IECEX: acc. to certificate ATEX/IECEX									
Pressure cycles	≥ 100 Mio. (1,2xPN)									
Environmental conditions										
Environmental temperature	-40°C...+100°C / ATEX/IECEX: see certificate									
Protection level	IP69K/IP67 (EN/IEC 60529)									
MTTF	4...20mA: 745 years / 0-10V: 610 years / RS485 Modbus®-RTU: 561 years / IO-Link®: 601 years									

Electrical connection

Electronic output type A Current 4...20mA FSK Connection plug M12 – FSK interface Device within Ex-free area	Electronic output type V RS485 Modbus®-RTU	Electronic output type L IO-Link®	Electronic output type B Voltage 0...10V

Dimensions (mm)

Plug M12 [14-S]	Plug EN 175-301-803-C [14-C]	Plug EN 175-301-803-A [14-A]
M12x1 10 Ø26 35 [11-0] 57 [11-1] 13 2 Ø3,5 Ø5 Ø9,5 G 1/4" A 16,5x11,6x1,5 ISO 1179-2 E 27	28 50 Ø26 35 [11-0] 57 [11-1] 13 2 Ø3,5 Ø5 Ø9,5 G 1/4" A 16,5x11,6x1,5 ISO 1179-2 E 27	36 49 Ø26 35 [11-0] 57 [11-1] 13 2 Ø3,5 Ø5 Ø9,5 G 1/4" A 16,5x11,6x1,5 ISO 1179-2 E 27

Thread ISO 228-1 – G1/4", EN 837 [04-6]	Thread ISO 228-1 – G1/2", EN 837 [04-1]
Process pressure P_{max} = 600 bar Torque M_{max} = 50Nm	Process pressure P_{max} = 600 bar Torque M_{max} = 50Nm
M12x1 10 Ø26 35 [11-0] 57 [11-1] 13 2 Ø3,5 Ø5 Ø9,5 G 1/4" A 16,5x11,6x1,5 ISO 1179-2 E 27	M12x1 10 Ø26 35 [11-0] 57 [11-1] 17 20 3 Ø3 Ø6 Ø17,5 G 1/2" A 23,9x18,5x1,5 ISO 1179-2 E 27

Further terminal assignment and dimensional drawings can be found in the operating instructions or in the technical information.

Order

code

PU4S

Standard

Measuring system – material diaphragm (process wetted) / sensor type Ceramic Al₂O₃ 96% / strain gauge

Approval
Standard

S
ATEX IK1 G / IECEx Ex ia IIC Ga resp. ATEX II 1 D / IECEx Ex ia IIIC Da (only Output type – A and Electronical connection – S)

Process connection

- 3 Thread ISO 228-1 – G $\frac{1}{4}$ "A, ISO 1179-2 E
- 6 Thread ISO 228-1 – G $\frac{1}{4}$ "A, EN 837 (Manometer)
- 4 Thread ISO 228-1 – G $\frac{1}{4}$ "I, internal thread
- 1 Thread ISO 228-1 – G $\frac{1}{2}$ "A, EN 837 (Manometer)
- 2 Thread ISO 228-1 – G $\frac{1}{2}$ "A, ISO 1179-2 E, internal drill
- 8 Thread ISO 228-1 – G $\frac{3}{4}$ "A, ISO 1179-2 E, front-flush
- 5 Thread ISO 228-1 – G1"A, ISO 1179-2 E, front-flush
- E Thread ANSI – NPT $\frac{1}{4}$ "
- C Thread ANSI – NPT $\frac{1}{2}$ "
- Y others

Material process gaskets (process wetted)

- 1 FPM – fluorelastomere (e.g. Viton®)
- 3 EPDM – ethylene-propylene-dienmonomere, FDA-listed
- Y others

Material process connection (process wetted)

V CrNi-steel

Material terminal

@enclosure CrNi-steel

Measuring range

- 02 0...250 mbar
- 03 0...400 mbar
- 04 0...600 mbar
- 05 0...1 bar
- 06 0...1,6 bar
- 07 0...2,5 bar
- 08 0...4 bar
- 09 0...6 bar
- 10 0...10 bar
- 11 0...16 bar
- 12 0...25 bar
- 13 0...40 bar
- 14 0...60 bar
- 15 0...100 bar
- 20 0...160 bar
- 21 0...250 bar
- 22 0...320 bar
- 23 0...400 bar
- 24 0...600 bar
- 16 -1...0 bar
- 17 -1...+1 bar
- YY Special

measuring range

Electronic – output

- Current 4...20mA, FSK, 2-wire
- Voltage 0-10V, (only with Electrical connection – C or A)
- RS485 Modbus®-RTU, 4-wire (only with Electrical connection – S)
- IO-Link®, 1x current 0/4...20mA / 2x switch, 4-wire (only with Electrical connection – S)

Electronic – function

Standard

d

Process temperature

- Standard –40°C...+100°C
- Extended –40°C...+135°C, temperature decoupler

Pressure type

- Gauge pressure
- Absolute pressure, $\geq$ 1bar ... $\leq$ 40bar

Measuring system – accuracy

- 0,5%
- Xcellence – 0,15%, linearization protocol

Electrical connection

- Plug M12x1
- Plug EN 175-301-803-C (DIN 43650-C)
- Plug EN 175-301-803-A (DIN 43650-A)

Additional options

- SF LABS-free, silicone-free / paint compatible version
- ML Measurement point designation / TAG – Laser marking
- MZ Material test certificate – EN10204 3.1
- WT Factory certification – drink water suitability
- KF Configuration / Preset
- WK Factory calibration – calibration certificate

Precont®

PU4S

K

V

C

S

PRC Technologies Corp., Ltd. ถาดพร้าว 101 กรุงเทพฯ 10240

โทรศัพท์ : 02 530 1714, 02 932 1711 มือถือ : 086 360 8600

อีเมล : contact@prctech.net LINE ID1 : prctec-info, LINE ID2 : prcsense