



Fill level measurement



Type: Vibrocont
SCM 300

Vibration level limit switch for liquids;
Miniaturized small vibration fork
Screw-in thread G $\frac{1}{2}$ " und G $\frac{3}{4}$ "

Description

Vibrocont SCM-300 is a point level switch for liquids. The Vibrocont SCM-300 is designed for industrial applications in all industries, mainly the machinery industry. The Vibrocont SCM-300 is used for overfill prevention or pump dry-run protection in cleaning and filter systems as well as in cooling and lubrication vessels.



Application

- External test option using test magnet
- On-site control using external LED display

Your benefits

- Compact: Smallest vibronic sensor
- Safe: Continuous self-monitoring and reliable switching independent of media properties
- Easy: no calibration or adjustment; plug & play
- Service-friendly plug-in connections
- For medium temperatures up to 150 °C



Special

up to
40
bar
pressure


WHG
licence

corrosion
resistant

compact
design



Order code. page |04|

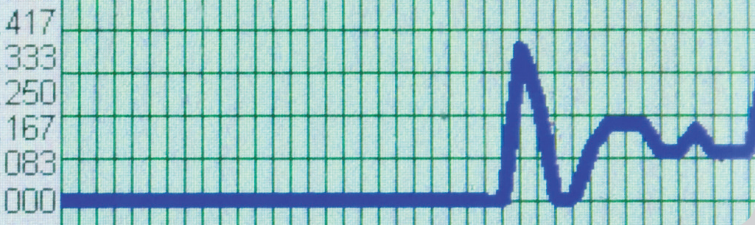


Technical data

Technical data	
Measuring Principle:	Vibration Liquids
Characteristic / Application:	Level switch for liquids and is used in tanks, vessels and pipes.
Supply / Communication:	20 ... 253V AC/DC, 2-wire; 10 ... 35V DC-PNP 3-wire
Ambient temperature:	40 °C ... 70 °C (-40 °F ... 158 °F)
Process temperature: -	40 °C ... 150 °C (-40 °F ... 302 °F)
Process pressure absolute / max. over-pressure limit:	Vacuum ... 40 bar (Vacuum ... 580 psi)
Min. density of medium:	>0,7g/cm ³ (>0,5g/cm ³ optional)
Main wetted parts:	316L
Process connection Threads:	G1/2, G3/4, G1, MNPT1/2, MNPT3/4, MNPT1, R1/2, R3/4, R1
Output:	AC/DC, DC-PNP
Certificates / Approvals:	WHG; EN10204-3.1 material; Final Inspection Report
Options:	Adjustment switching delay; Cleaned from oil+grease, PWIS free

Connection


Electronic: 3-wire-DC-PNP

Valve plug

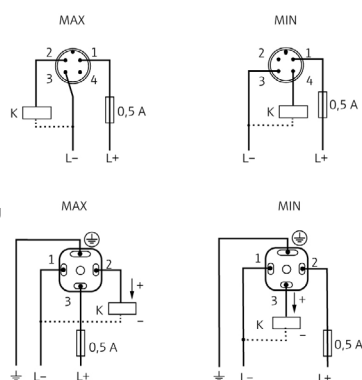


Electronic: 2-wire-AC/DC


Valve plug




Compact version
Thread ISO 228 G1/2", G3/4"

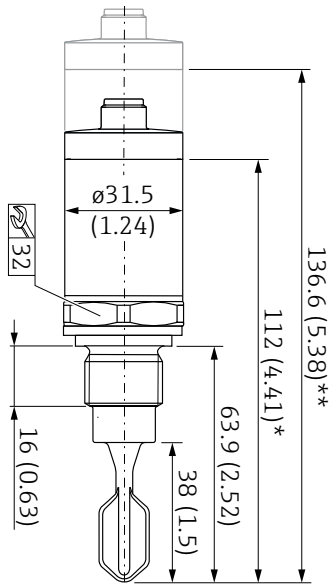

Compact version
Thread ISO 228 G1"

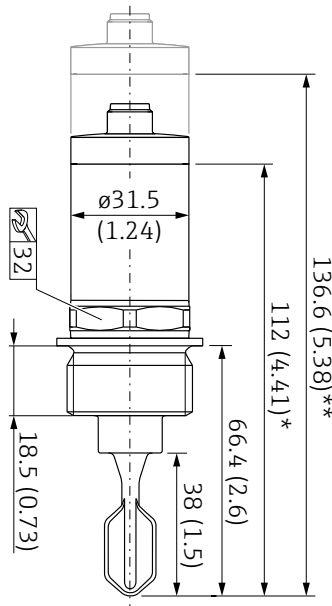


Compact version thread ISO
228 G1" for flush wall
installation in welding adapter

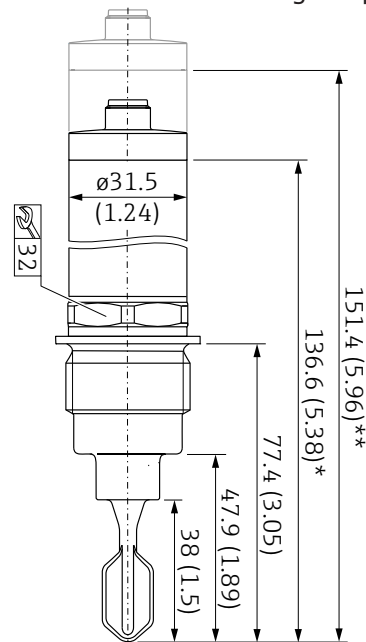


* Dimensions for process temperature max. 100 ° C
** Dimensions for process temperature max. 150 ° C


Short tube version
Thread ISO 228 G1/2", G3/4"

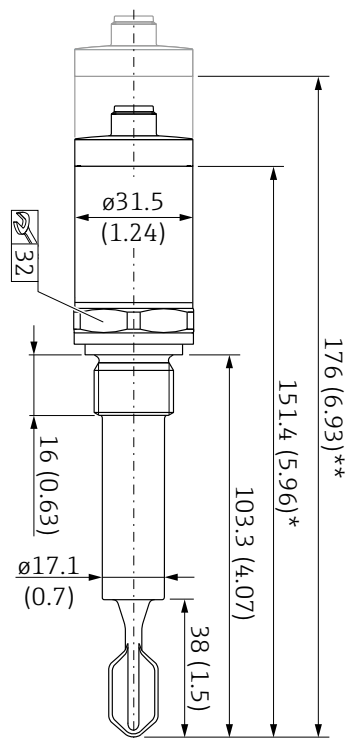

Short tube version
Thread ISO 228 G1"

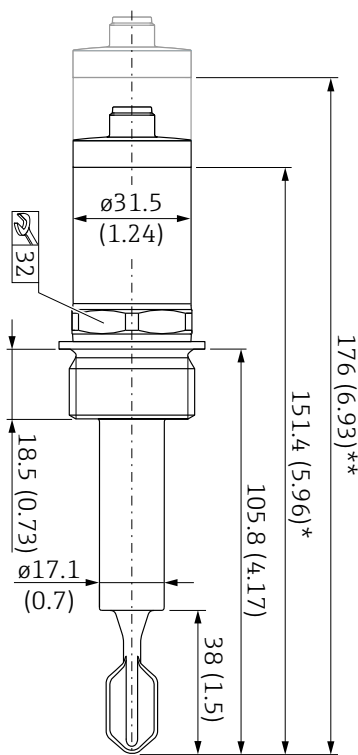

Short tube version thread ISO
228 G1" for flush wall installati-
on in welding adapter

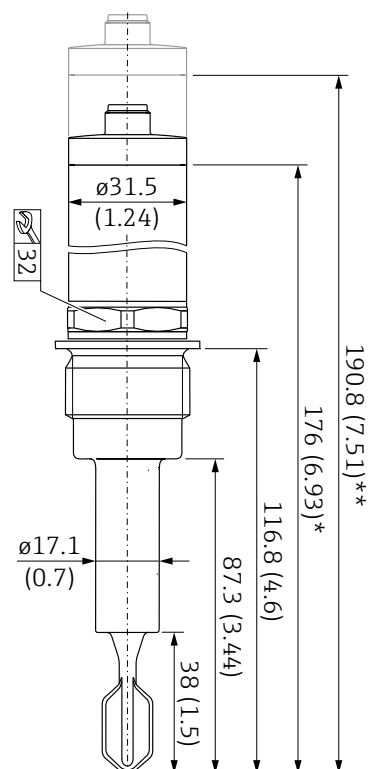

Order code

- 300 Standard admission 100°C
- 302 Overfill safety WHG + leakage detection 100°C process temperature
- 350 Standard admission 150°C
- 352 Overfill safety WHG + leakage detection 150°C process temperature

- Construction form**
- K Compact version
 - R Probe extension: tube (= Switching point as VCL 200/202)
 - Y Special version
- Process connection**
- 2 Screw-in piece G½"
 - 1 Screw-in piece G¾"
 - 6 G1" B; DIN EN ISO228-1, flush mounting in welding socket BEFV-10 (= Process connection as VCL 200/202)
 - 7 Screw-in piece G1"
 - Y Special version

- Electronics**
- WA Electronic: 20...253V AC/DC
 - GA Electronic: 10...30V DC
 - Y Special version

- Electrical connection**
- 02 Model: valve plug
 - 01 Model: plug M12 (not for AC-Version)
 - Y Special version

S Standard

Order code

Vibrocont SCM

S

PRC Technologies Corp., Ltd. อาคาร 101 กรุงเทพฯ 10240

โทรศัพท์ : 02 530 1714, 02 932 1711 มือถือ : 086 360 8600

อีเมล : contact@prctech.net LINE ID1 : prctec-info, LINE ID2 : @prctec

Equipment

Ordering designation

BEF-SCM34
LKW 0405 PUR
LKW P405 PUR
BKZ0412 VA

Type

welding socket G¾"
connection cable 5 m
connection cable LED 5 m
cable socket

